
STONELUX

PRODUCT SPEC SHEET

PORCELAIN PAVER

# TERRAZO GRIGIO MATTE 24X24X2CM RECTIFIED PORCELAIN PAVER



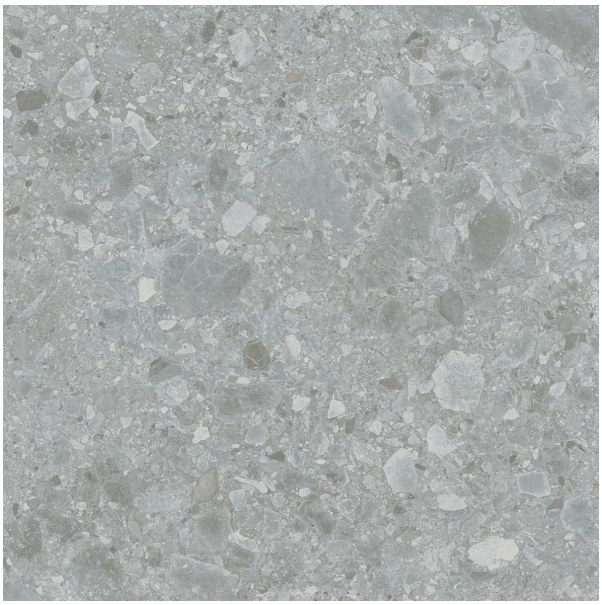

## Modern porcelain surfaces with low-maintenance performance.

Terrazo Grigio Matte 24x24x2cm Rectified Porcelain Paver is a gray porcelain paver from the Porcelain Paver Collection. The 24x24x2cm rectified format, 0.75" (2CM) thickness, and Matte surface are used for exterior paving layouts where a controlled color range, consistent sizing, and porcelain performance are important.

## PRODUCT DETAILS

| | |
|---|---|
| SKU | SS2000183 |
| COLLECTION | Porcelain Paver |
| PRODUCT TYPE | Paver |
| PRODUCT FAMILY | 24x24 Porcelain Paver |
| FINISH | Matte |
| SIZE | 24x24 |
| THICKNESS | 0.75" (2CM) |
| COLOR | Gray |
| RECOMMENDED USES | Pool & Patio Deck, Walkway, Driveway, Stepping Stones, Roof Deck |
| PACK | 7.75 sqft |
| SOLD AS | Sold by SQFT. Full box only (7.75 sqft/box) |
| WEIGHT | 9.78 lbs / sqft |

## TECHNICAL SPECIFICATIONS

| | | | |
|---|---|---|---|
| SEALER REQUIREMENT | Not Required | WATER ABSORPTION (BY MASS) (EN ISO 10545-3) | < 0.1 % |
| BREAKING STRENGTH (EN ISO 10545-4) | > 9500N (~13000 psi) | FLEXTURAL-BENDING STRENGTH (EN ISO 10545-4) | min 35 N/mm² (~5000 psi) |
| COEFF. OF THERMAL EXPANSION (EN ISO 10545-8) | < 9.0 x 10-6 | THERMAL SHOCK RESISTANCE | Resistant |
| CRAZING RESISTANCE | Resistant | FROST RESISTANCE | Resistant |
| REACTION TO FIRE | Class A1 | DCOF (DRY/WET) | 0.81 - 0.69 (R-11 - Antislip) |
| MOHS SCALE | ≥ 7 Mohs | CHEMICAL/ACID RESISTANCE | Yes |
| ORIGIN COUNTRY | Turkey | APPLICATION AREAS | Indoor, Outdoor |
| CUSTOM FABRICATION | Limited (custom bullnose and lamination - local/overseas) | APPLICATION CATEGORY | Residential, Light Commercial, Heavy Commercial |
| COLLECTION PRODUCTS | Paver 20mm (0.78") | PALLET WEIGHT (LBS) | 2320 lbs |

## COLORS AND SIZES IN THE TERRAZO SERIES



Cream
24x24



Grigio · Shown above
24x24

© STONELUX | Product information, availability, and specifications may change without notice.